
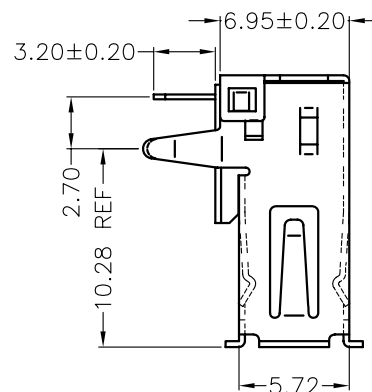
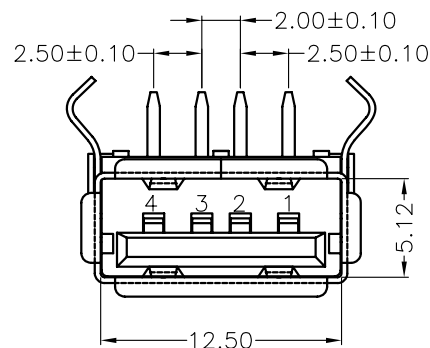
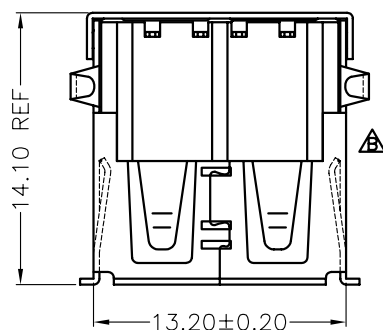




Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:750V AC For One Minute

Operating Temperature Range:-40°C ~ +105°C

Material and Finish

Insulator:PBT (UL94V-0)

Insulator Color:Black

Contact:Phosphor Bronze

Plating:Gold Plated on Contact Area,

Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated

How To Order


5075AR-04-XX-XX

Standard Gold Plated 1u"

30:Selective Gold Plated 30u"



BK:Black

WH:White

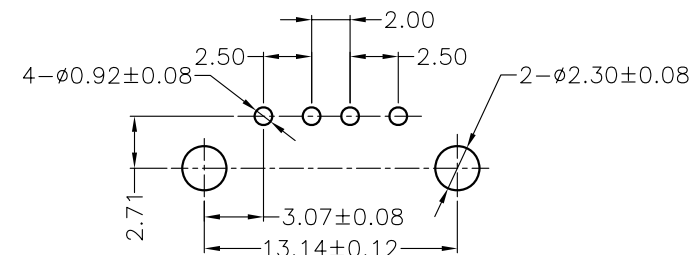

PCB Layout
Tolerance:±0.10

RoHS Compliant

				DRAWN: Richie	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.		
				CHECKED: Jeremy Liu	UNIT: MM			
C					SCALE:1:1	DESCRIPTION: USB A Type PCB Socket Right Angle		SIZE
B	07-Jul-2011	ECN-CN1107004	Zhou Lin		SHEET: 1 / 1	PART NO: 5075AR-04-XX-XX		A4
A	05-Nov-2010	(PC0420)	Richie	APPROVAL: Mike Wu	PROJECTION: 			
REV	DATE	FILE	BY					